

PowerLite® 470, 475W, 480 and 485W ULTRA-SHORT-THROW PROJECTORS



Ultra-short-throw projectors with comprehensive connectivity and premium audio.

The PowerLite 470/475W/480/485W ultra-short-throw projectors make it easy to project large, vibrant images from the shortest distance for maximum impact and flexibility. They can be mounted to the wall with the included wall mount, making them ideal for use with interactive or standard dry-erase whiteboards. Project a brilliant 80" image on a wall or screen from approximately 8" away from the edge of the projector. The 475W and 485W boast a 16:10 widescreen (WXGA) aspect ratio for displaying high-definition content, and content from widescreen computers, while the 470 and 480 boast a 4:3 (XGA) aspect ratio. Featuring future-ready HDMI connectivity, all four projectors are ideal for classrooms equipped with the latest devices.

Ultra-short throw distance — ideal for wall-mount installations and use with interactive or standard dry-erase whiteboards; significantly reduces shadow interference and glare

Larger-than-life standard and widescreen images — XGA resolution (470, 480), WXGA resolution (475W, 485W)

Future-ready connectivity — HDMI digital connectivity for classrooms with the latest devices



The best-selling projectors in the world

Epson understands education and has a solution no matter what your teaching scenario. Built with image guality and reliability in mind, EPSON® projectors enhance communication and inspire collaboration, while offering a low cost of ownership. From long-throw projectors designed for traditional educational settings to ultra-short-throw and all-in-one solutions built for progressive classrooms, Epson has the model made for you.



Leading-edge technology and performance

Spectacular quality and color with **3LCD technology**


Innovative technology with proven reliability

- · 3 chips for full-time, vibrant color
- 25% less electricity required per lumen of brightness when compared to 1-chip DLP projectors¹
- Over 20 years of road-tested reliability built into every projector



HIP

CERTIFIED



Long-life lamp

- High-efficiency lamp life provides a low total cost of ownership — up to 3000 hours in Normal Mode and up to 4000 hours in ECO Mode²
- Easy replacement top-loading lamp means you don't have to uninstall the projector from the wall mount

Brilliant widescreen performance (PowerLite 475W/485W only)

- High-definition WXGA (1280 x 800) resolution and a 16:10 aspect ratio allow you to project HD widescreen content as well as content from widescreen notebooks
- · Get amazing images and 30% more image area than with a standard 4:3 projector, plus the capability to display 4:3 and 16:9 content, without sacrificing image quality



1024 x 768



WXGA

1280 x 800

Amazing color and white light output

Whether you're projecting images with deep, dark colors or a white screen with minimal text or graphics, you get rich, colorful images with:

LUMENS **260**U H WHITE LIGHT TRUE-TO-LIFE COLOR

2600 lumens of color/white

light output³





PowerLite 480


3000 lumens of color/ white light output³ PowerLite 470 and 475W

3100 lumens of color/white light output³ (bright enough for classrooms with lots of ambient light)

Ultra-short-throw projection

A leader in ultra-short-throw projection, Epson designed these projectors to ensure the following benefits:

- Large images to engage any audience project an 80" image from approximately 8" away
- Minimal shadow interference no need to worry about obscuring the screen with shadows cast by the presenter
- Minimal glare unlike traditional front-projection technology, these projectors make it more comfortable for presenters since they do not have to deal with light shining in their eyes
- · Wall mount installation makes these projectors ideal for use with interactive or standard dry-erase whiteboards



Significant reduction in shadow interference and glare

Advanced connectivity including network features

Ηοπι

HDMI for high-definition video and audio

- Delivers both audio and brilliant HD video content with just one cable
- Future-ready connectivity ensures compatibility with the latest laptop, Blu-ray® and media playing devices



Present remotely via RJ-45 network connectivity

Transmit both audio and video with a single connection

- Display material from any networked location, or in up to 4 different classrooms simultaneously
- Present remotely to support distance learning applications
- Connect wirelessly, via a network access point or optional wireless module, to give teachers the freedom to move around the classroom and interact with students for a more engaging learning environment



Monitor/control projectors remotely

Easily monitor/control EPSON networked projectors remotely, using the RJ-45 connection and EasyMP® Monitor software

- Save time and maintenance costs power classroom projectors on and off without having to go to each individual classroom; set schedules for automatic events
- Receive e-mail alerts when attention is required
- Crestron RoomView[™] enabled monitor/control your projector with RoomView software, without the need for an A/V control box



 Broadcast your message — advertise events or broadcast instructions to all networked EPSON projectors⁵

Virtual remote control on your computer


- Convenient projector remote control via a web browser (when projector is connected to the network)
- Control power on/off, source, volume, page up/down functions and more from your computer
- No special applications or software necessary; simply use your web browser in Windows[®] or Mac



Easy setup using 3-in-1 USB Plug 'n Play — for PC and Mac

Three features, all with one standard USB connection

- Display your presentation
- Transmit audio
- Control your presentation via remote control
- Eliminate the need for three separate cable connections




Convenient control and energy-saving features

- Instant Off[®] no cool-down time required; it's ready to shut down when you are
- AV Mute pause your presentation to direct focus elsewhere or take a quick break
- Sleep Mode set from 1 to 30 minutes to save energy when no signal is detected
- Direct Power On/Off power the projector on/off with the flip of a wall switch

Easy setup with included wall mount


Versatile image projection

 Improved mount and short throw distance allows 90" WXGA image projection, even in rooms with ceilings as low as 8' — like portable classrooms




Easy picture adjustments

- 1.35x digital zoom for positioning flexibility
- +/- 5 degrees vertical keystone correction allows for easy adjustments when the projector is placed above or below the center of the projection screen
- +/- 5 degrees horizontal keystone correction allows for off-center positioning, so you can still present a rectangular image



Without horizontal keystone




With horizontal keystone



New, improved wall mount included

- Flexible wall mount makes installation in a wide variety of classroom environments easy
- Includes adjustments for horizontal roll, horizontal rotation, vertical tilt, horizontal shift, distance extensions and vertical height adjustments for precise installations



• Large, color-coded dials provide intuitive guidance on adjustments

Quick Corner®

• This innovative feature allows you to move any of the four corners of an image independently, for a perfectly rectangular picture



Better Products for a Better Future™

For more information on Epson's environmental programs, go to eco.epson.com

Eco Features

- Energy-efficient 3LCD light engine
- Recyclable product⁶
- Epson America, Inc. is a SmartWay[™] Transport Partner⁷



Unique sound and communication tools

Built-in 16 W speaker and microphone input

- Captivate your entire classroom with 16 W of powerful sound using the internal speaker
- Convenient microphone input allows you to connect a microphone to the projector and amplify your voice through the projector's built-in speaker
- The microphone can even be used while the projector is in standby mode, which saves energy and costs
- Audio pass-through feature enables you to use the audio out port with external speakers, even when the projector is in standby mode, saving lamp life and energy



Built-in closed captioning

• Essential for education — helps meet ADA508 requirements for students with hearing impairments




- Helps save money no need to pay for an additional decoder and installation
- Effective and easy to use easily enabled or disabled through the projector remote or menu



Built-in teaching aids save time

- Choose from four pre-set templates to project lines or grids onto whiteboards or chalkboards, or create a custom template such as a map or other image used frequently
- Simply display the template by selecting the customizable User button on the projector remote control



Easily project lines or grids with built-in templates

PowerLite 470, 475W, 480 and 485W Additional Features

EPSON

 Versatile connectivity for the classroom — HDMI, VGA inputs (computer/component), audio inputs, USB, audio out, monitor out, microphone input, RS-232c and RJ-45




annamay

1

- Fast wireless 802.11 b/g/n connectivity with the optional wireless module via either:
 - Included software (Mac[®] and PC) or
 - Optional Quick Wireless Connection USB key for fast, ad hoc, wireless connectivity (PC only)
- High efficiency filter 2x the surface area of previous filters for better protection against dust; cleaning schedule up to 5000 hours⁴

The EPSON ultra-short-throw projector series Model Comparison

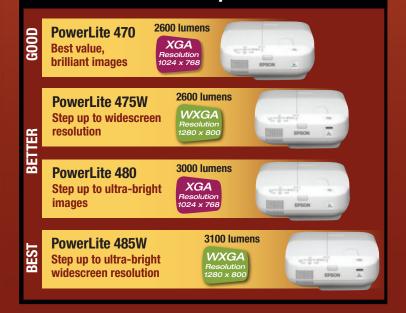

EXCEED YOUR VISION

PowerLite[®] 470, 475W, 480 and 485W Ultra-short-throw Projectors

Product Code

V11H456020

V11H455020

V11H485020

V11H454020

Product Name PowerLite 470 Projector PowerLite 475W Projector PowerLite 480 Projector PowerLite 485W Projector

Specifications

Projection System 3LCD, 3-chip technology **Projection Method** Front/rear wall mount **Driving Method** Poly-silicon TFT Active Matrix **Pixel Number**

470/480: 786,432 dots (1024 x 768) x 3 475W/485W: 1,024,000 dots (1280 x 800) x 3 Color Light Output[®]

470/475W: 2600 lumens 480: 3000 lumens 485W: 3100 lumens

White Light Output³

470/475W: 2600 lumens (ISO 21118 standard) 480: 3000 lumens (ISO 21118 standard) 485W: 3100 lumens (ISO 21118 standard)

Aspect Ratio 470/480.4.3

475W/485W: 16:10 **Native Resolution** 470/480: 1024 x 768 (XGA)

475W/485W: 1280 x 800 (WXGA)

Resize 640 x 480 (VGA), 800 x 600 (SVGA), 1024 x 768 (XGA/475W and 485W only), 1152 x 864 (SXGA), 1280 x 800 (WXGA/470 and 480 only), 1280 x 960 (SXGA2), 1280 x 1024 (SXGA3), 1280 x 768 (WXGA 60-1/470 and 480 only), 1360 x 768 (WXGA 60-2), 1440 x 900 (WXGA+), 1400 x 1050 (SXGA+), 1600 x 900 (WXGA++)

Lamp Type

470/475W: 190 W UHE 480/485W: 215 W UHE

Lamp Life² Up to 4000 hours (ECO Mode) Up to 3000 hours (Normal Mode)

Throw Ratio Range 470/480: 0.31 - 0.42 475W/485W: 0.27 - 0.37

Size (projected distance) 470/480: 55.9" to 93.2" (0.348 to 0.597 m) 475W/485W: 60" to 100" (0.348 to 0.597 m)

Keystone Correction Manual Vertical ± 5 degrees Horizontal ± 5 degrees

Mac Connectivity

Projector is Mac compatible via USB, DVI to HDMI or VGA adapter (not included), DP to HDMI or VGA

Contrast Ratio Up to 3000:1

Color Reproduction 16.77 million colors

1 Data source: ProjectorCentral.com Jan. 2011. Average of 1038 shipping models for which manufacturers provided lumens and total power data, all resolutions and brightness levels.

- Lamp life will vary depending upon mode selected, environmental conditions and usage. 2 Lamp brightness decreases over time.
- Color and white light output will vary depending on mode selected. White light output measured З using ISO 21118 standard.

Proj	ection	Lens
------	--------	------

UPC

0 10343 88581 3

0 10343 88579 0

0 10343 88580 6

0 10343 88578 3

Type No optical zoom/Manual focus F-number 1.80 **Focal Length** 3.71 mm Zoom Ratio Digital zoom 1.0 - 1.35

Other

Display Performance NTSC: 560 lines PAL: 560 lines (Depends on observation of the multi-burst pattern)

Input Signal


NTSC/NTSC4.43/PAL/M-PAL/N-PAL/PAL60/ SECAM

Interfaces

HDMI x 1 Computer/component video: D-sub 15 pin x 2 S-video: Mini DIN x 1 Composite video: RCA (Yellow) x 1 Audio in: RCA x 1 (L and R), Mini stereo x 2 USB connector: Type B x 1 (USB display, audio and mouse control) USB connector: Type A x 1 (USB memory/document camera) . RJ-45 x 1 Serial: RS-232c x 1 Monitor out: D-sub 15 pin x 1 Audio out: Mini stereo x 1 Microphone: Mini stereo x 1 Wireless LAN port: 802.11 b/a/n (optional - module sold separately) Speaker 16 W (mono) **Operating Temperature** 41 ° to 95 °F (5 ° to 35 °C)

Power Supply Voltage 100 - 240 V ± 10%, 50/60 Hz

Power Consumption 470/475W: 287 W (Normal Mode) 223 W (ECO Mode) 7.5 W Standby (Communication On) 0.2 W Standby (Communication Off) 480/485W: 313 W (Normal Mode) 223 W (ECO Mode) 7.5 W Standby (Communication On) 0.2 W Standby (Communication Off))

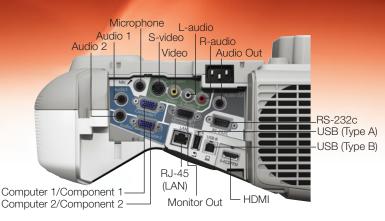

Other (continued)

Fan Noise

35 dB (Normal Mode) 28 dB (ECO Mode) Security Kensington®-style lock provision. padlock and security cable hole, password protect function

Dimensions (W x D x H)

Including feet: 14.4" x 14.7" x 7.1" Excluding feet: 14.4" x 14.7" x 5.6" Weight: 11.5 lb

Remote Control

Features

Source search, video, LAN, computer, USB, power, aspect, color mode, volume, e-zoom, A/V mute, freeze, menu, page up and down, help, auto, mouse functions, user, esc **Operating Distance**

Front/rear: 19.7' (6 m)

Support

The EPSON ConnectionSM Pre-sales support

U.S. and Canada 800-463-7766 Internet website www.epson.com

Service Programs

Two-year projector limited warranty, EPSON Road Service program, PrivateLine® dedicated toll-free support and 90-day limited lamp warrantv

What's In The Box

PowerLite 470, 475W, 480 or 485W projector, wall mount, 15' power cord, 16' computer cable (VGA), projector remote control, batteries, user manual CD, projector software CD, Quick Setup Sheet, installation guide, template sheet, PrivateLine support card, password protection sticker

Genuine EPSON lamp V13H010L71 Replacement air filter V13H134A40 PowerLite [®] Pilot[™] (ELPCB01) V12H443020 Active speakers (ELPSP02) V12H467020 Wireless pendant microphone (ELPMC02) (for use with PowerLite Pilot only) V12H4430M2 Wireless 802.11b/g/n LAN unit (ELPAP07) V12H418P12

Accessory Part Numbers

Quick wireless connection USB key (ELPAP08)	V12H005M08
EPSON DC-06 document camera (ELPDC06)	V12H321005
EPSON DC-11 document camera (ELPDC11)	V12H377020
4:3 Height-adjustable Wall Mount Solution	V12H457009
16:10 Height-adjustable Wall Mount Solution	V12H457010
4:3 Height-adjustable Cart Solution	V12H457007
16:10 Height-adjustable Cart Solution	V12H457008
90" whiteboard	V12H468002
96" whiteboard	V12H468001

Packaging Specifications

PowerLite 470/475W/480/485W

with Wall Mount Dimensions: 31.8" x 17.4" x 9.9" (W x D x H) 470/480/475W/485W: 37.4 lb

Genuine EPSON Lamp

Dimensions: 5.6" x 6.3" x 5.6" (W x D x H) Weight: 0.9 lb Master Carton Dimensions: 13.1" x 28.4" x 6.8" (W x D x H) Weight: 11.2 lb Units Per Master Carton: 10

Replacement Air Filter

Dimensions: 4.5" x 7.9 x 1.0" (W x D x H) Weight: 0.1 lb Master Carton Dimensions: 8.4" x 11.6" x 5.0" (W x D x H) Weight: 1.8 lb Units Per Master Carton: 10

- 4 Recommendation based on normal room conditions. Cleaning requirements may vary depending on use, environment and other conditions. Cleaning intervals may be adjusted to accommodate the environment in which the projector is used.
- Works only with EPSON projectors that support presentation over the network capability. 5
- See our website for convenient and reasonable recycling options at www.epson.com/recycle 6
- SmartWay is an innovative partnership of the U.S. Environmental Protection Agency that reduces greenhouse gases and other air pollutants and improves fuel efficiency

Epson America, Inc. 3840 Kilroy Airport Way, Long Beach, CA 90806 Epson Canada Limited 185 Renfrew Drive, Markham, Ontario L3R 6G3 www.epson.com www.epson.ca

EPSON, EasyMP, Instant Off, PowerLite and Quick Corner are registered trademarks, EPSON Exceed Your Vision is a registered logomark and Better Products for a Better Future is a trademark of Seiko Epson Corporation. BrightLink and PrivateLine are registered trademarks, Pilot is a trademark and EPSON Connection is a service mark of Epson America, Inc. Mac is a trademark of Apple, Inc., registered in the U.S. and other countries. SmartWay is a service mark of the U.S. Environmental Protection Agency. All other product and brand names are trademarks and/or registered trademarks of their respective companies. Epson disclaims any and all rights in these marks. Copyright 2012 Epson America, Inc. CPD-36421 1/12