






MULTIMEDIA PROJECTOR X303



EASY-TO-USE PERFORMANCE TOOL



-  Comprehensive connectivity to satisfy your current and future needs
-  15,000:1 Contrast ratio helps deliver the most impactful presentations
-  Up to 10,000 hours of lamp life for minimal cost of operation
-  Full featured remote for maximum convenience
-  RS-232C port for remote operation and control

Full 3D

HDMI
HIGH DEFINITION MULTIMEDIA INTERFACE

HDTV
MONITOR



DESIGNED BY
DLP
TEXAS INSTRUMENTS

RoHS
COMPLIANT



The Optoma X303 projector generates a powerful, up to 3000 lumens bright image, combined with an industry leading 15,000:1 contrast ratio to bring out the finest details on your most important presentations or class lessons. HDMI connectivity for full digital compatibility as well as two VGA inputs, composite and S-video to satisfy your current and future needs.

The X303 is incredibly easy to operate. Connect power and source, press the power ON button, and you will be presenting in no time.

CONNECTIVITY (May require optional accessories)



COMPUTERS



SMART
PHONES



TABLETS



3D BLU-RAY/DVD PLAYERS

SET TOP BOXES



CAMCORDERS



GAME
CONSOLES



DIGITAL
CAMERAS

MULTIMEDIA PROJECTORS — X303

OPTICAL/TECHNICAL SPECIFICATIONS


Display Technology	Single 0.55" DC3 DMD DLP® Technology by Texas Instruments™
Native Resolution	XGA (1024 x 768)
Maximum Resolution	UXGA (1600 x 1200) & 1080p (1920 x 1080)
Brightness	3000 ANSI lumens
Contrast Ratio	15,000:1 (full on/full off)
Displayable Colors	1.07 Billion
Lamp Life and Type*	10,000/6500/6000/4500 Hours (Education cycle/ECO+/Dynamic/Bright) 190W
Projection Method	Front, rear, ceiling mount, table top
Keystone Correction	±40° Vertical
Uniformity	>80%
Offset	115%
Aspect Ratio	4:3 Native, 16:9 compatible
Throw Ratio (distance/Width)	1.97–2.17
Projection Distance	3.9'–32.8' (1.2–10 m)
Image Size (Diagonal)	30"–300" (0.7–7.62 m)
Projection Lens	F=2.51–2.69, f=21.95–24.18 mm, 1.1x manual zoom and focus
Digital Zoom	0.8 ~ 2.0
Audio	2-Watt speaker
Noise Level	26dB
Remote Control	IR remote mouse control
Operating Temperature	41–113°F (5–45°C), 85% max humidity
Power Supply	AC Input 100–240V, 50–60Hz, auto-switching
Power Consumption	Max 240W (Normal), Min 194W (Eco+), <0.5W (standby-ECO)

COMPATIBILITY SPECIFICATIONS

Computer Compatibility	UXGA, WXGA, SXGA+, SXGA, XGA, SVGA, VGA resized, VESA, PC and Macintosh compatible
Video Input Compatibility	NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i/p)
3D Compatibility†	Supports all HDMI 1.4a mandatory 3D format, side-by-side format and top and bottom format
Vertical Scan Rate	24–85Hz, 120Hz
Horizontal Scan Rate	15.375–91.146KHz
User Controls	Complete on-screen menu, adjustments in 27 languages
IO Connection Ports	HDMI v1.4a, two VGA-in, VGA-out, S-video, composite video, two audio-in, audio-out, RS-232C, USB-B
Loop Through (Audio, VGA)	<i>Monitor:</i> D-Sub 15 pin VGA output (functional in both normal and standby modes), <i>Audio:</i> VAO audio out, HDMI VAO audio out supported, (VAO in normal mode, fixed during Standby)

PHYSICAL SPECIFICATIONS

Security	Kensington® Lock Port, security bar and keypad lock
Weight	4.9 lb (2.21 kg)
Dimensions (W x H x D)	12.4' x 4.6" x 8.8"

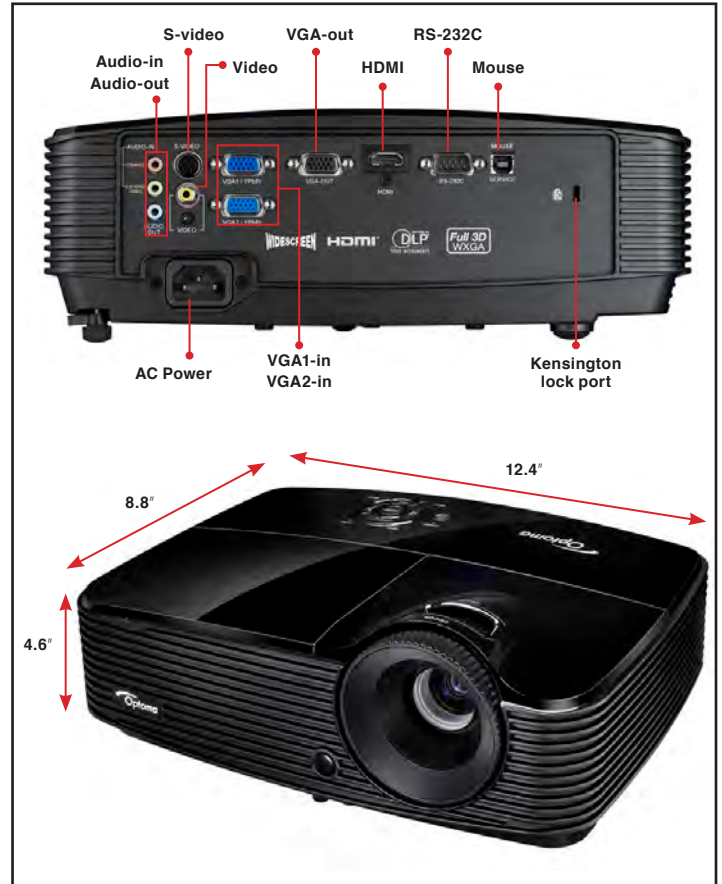

Warranty

2-Year Optoma Express Service, 1-Year Lamp

In the Box (Standard Accessories)

AC power cord, VGA to VGA cable, remote control, batteries for remote, multilingual CD-ROM user's manual, quick start card, and warranty card

Optional Accessories

HDMI cable, ceiling mount, component to VGA cable, RS-232 cable, Optoma screens and DLP® Link™ 3D glasses

Accessory Part Numbers:

Lamp: BL-FU190C
Mount: BM-5001U
Wireless VGA dongle: BI-EXTBG03
Remote: BR-5043N
Power cord (5m): BC-PUPIXY05
DLP® Link™ 3D glasses: BG-ZD301

UPC: 796435 41 816 8

*Lamp life is dependent on many factors, including lamp mode, display mode, usage, environmental conditions and more. Lamp brightness can decrease over time.

†3D content can be viewed with active LCD shutter glasses or RF glasses when projector is used with compatible 3D player. Please visit www.Optoma.com for more information.