

MULTIMEDIA PROJECTOR W313



EASY-TO-USE PERFORMANCE TOOL



Comprehensive digital and analog connectivity for maximum compatibility with all your devices



20,000:1 Contrast ratio help deliver the most impactful presentations



Up to 10,000 hours lamp life for minimal cost of operation



Full featured remote for maximum convenience



RS-232 port for convenient fixed installation monitoring and control



The Optoma W313 projector generates a powerful, up to 3200 lumens bright image, combined with an industry leading 20,000:1 contrast ratio to bring out the finest shadow details on your most important presentations.

Delivers sharp, crystal clear, easy to read text and graphics to the screen with rich, accurate colors.

Offers HDMI connectivity, 2x VGA inputs, composite and S-Video inputs and audio out jack to satisfy your current and future needs. The Optoma W313 projector is easy to operate. Simply connect power and source computer, press the power ON button and you will be presenting in no time.

CONNECTIVITY (May require optional accessories)



COMPUTERS



SMART PHONES



TABLETS



3D BLU-RAY/DVD PLAYERS

SET TOP BOXES



CAMCORDERS



GAME CONSOLES



DIGITAL CAMERAS



Roku®



Apple TV®



Chromecast™

MULTIMEDIA PROJECTOR — W313

OPTICAL/TECHNICAL SPECIFICATIONS

Display Technology	Single 0.65" DC3 DMD DLP® Technology by Texas Instruments™
Native Resolution	WXGA (1280 x 800)
Maximum Resolution	VGA port: UXGA (1600 x 1200) HDMI port: WUXGA (1920 x 1200)
Brightness	3200 lumens
Contrast Ratio	20,000:1 (full on/full off)
Displayable Colors	1.07 Billion
Lamp Life and Type*	10,000/6500/6000/4500 Hours (Education cycle/Eco+/Dynamic/Bright) 190W
Projection Method	Front, rear, ceiling mount, table top
Keystone Correction	±40° Vertical
Uniformity	>80%
Offset	112%
Aspect Ratio	16:10 Native, 16:9 and 4:3 compatible
Throw Ratio (distance/Width)	1.47–1.83
Projection Distance	3.9'–32.8' (1.2–10 m)
Image Size (Diagonal)	30"–300" (0.7–7.62 m)
Projection Lens	F=2.57–2.84, f=21–25.6 mm, 1.2x manual zoom and focus
Digital Zoom	0.8 ~ 2.0
Audio	2-Watt speaker
Noise Level	26dB
Remote Control	IR remote mouse control
Operating Conditions	41–113°F (5–45°C), 85% max humidity
Power Supply	AC Input 100–240V, 50–60Hz, auto-switching
Power Consumption	Max 240W (Normal), Min 194W (Eco+), <0.5W (standby-ECO)

COMPATIBILITY SPECIFICATIONS


Computer Compatibility	WUXGA, HD, UXGA, WXGA, SXGA+, SXGA, XGA, SVGA, VGA resized, VESA, PC and Mac compatible
Video Input Compatibility	NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i/p)
3D Compatibility†	Supports all HDMI 1.4a mandatory 3D formats (Frame pack, side-by-side, top-bottom) and up converts frame rate from 60Hz to 120Hz or 24Hz to 144Hz (i.e 60 or 72 frames per eye). 3D glasses are needed and is sold separately. Refer to user manual for details.
Vertical Scan Rate	24–85Hz, 120Hz
Horizontal Scan Rate	15.375–91.146KHz
User Controls	Complete on-screen menu, adjustments in 27 languages
I/O Connection Ports	HDMI v1.4a, two VGA-in, VGA-out, S-video, composite video, two audio-in, audio-out, RS-232C, USB-A
Loop Through (Audio, VGA)	<i>Monitor:</i> D-Sub 15 pin VGA output (functional in both normal and standby modes), <i>Audio:</i> VAO audio out, HDMI VAO audio out supported, (VAO in normal mode, fixed during Standby)

PHYSICAL SPECIFICATIONS

Security	Kensington® Lock Port, security bar and keypad lock
Weight	4.9 lb (2.21 kg)
Dimensions (W x H x D)	12.4" x 4.6" x 8.8" (315 x 117 x 223 mm)

*Lamp life is dependent on many factors, including lamp mode, display mode, usage, environmental conditions and more. Lamp brightness can decrease over time.

†3D content can be viewed with either RF or DLP Link active shutter glasses when projector is used with a compatible 3D player. RF 3D glasses require the use of an RF 3D emitter and a projector with a 3D VESA Sync port. Please visit www.OptomaUSA.com for more information.

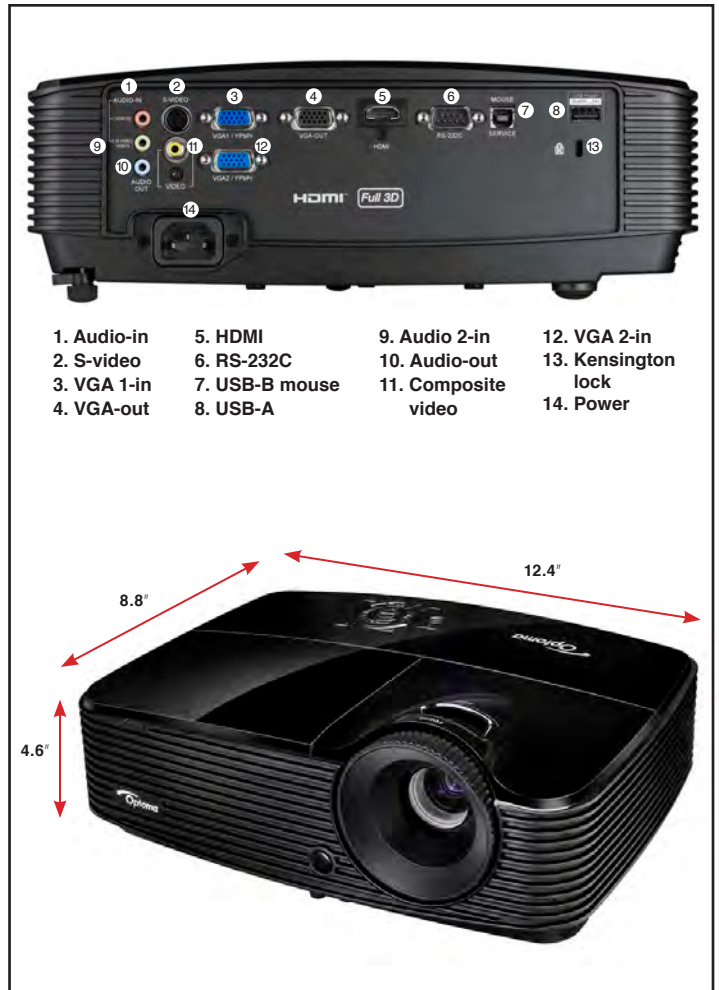

Warranty

1-Year Limited Parts and Labor, 90-Days on Lamp

In the Box (Standard Accessories)

W313 projector, AC power cord, VGA to VGA cable, remote control, batteries for remote, carrying case, multilingual CD-ROM user's manual, quick start card, and warranty card

Optional Accessories

Universal ceiling mount, Optoma screens, DLP® Link™ 3D glasses, wireless HDMI system and Single-Cat6 HDBaseT

Accessory Part Numbers:

Lamp: PQ684-2400	Remote: J8947-0383-00
DLP® Link™ 3D glasses: ZD302	Carrying case: BK-4032
Single-Cat6 HDBaseT kit: EVBMN-M110	Wireless HDMI system: WHD200
Universal ceiling mount: OCM818B-RU	Universal ceiling mount: BM-5001U
Universal ceiling mount (with extension pole): OCM815B	

UPC 796435 41 910 3

www.OptomaUSA.com

Optoma
Projector Expert

Copyright © 2014 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments™. All other trademarks are the property of their respective owners. All specifications subject to change at any time. 14917