# **MULTIMEDIA PROJECTOR** DW326e

01.1

O


03



## **COMPACT WIDESCREEN POWERHOUSE**




Full 3D



Full 3D for the most immersive viewing experience

Advanced energy saving features reduce cost of operation



HOMI



Whether on the road or at the office, the Optoma DW326e will help you get your point across. It delivers a powerful 3000 lumens bright image with fantastic color reproduction and amazing detail to make your presentations, graphics and movies stand out above the rest.

The Optoma DW326e is compact in size, yet has the power and features of larger units. HDMI 1.4a for maximum connectivity with today's digital devices, VGA-in and VGA-out, S-Video, Composite video, Audio in, Audio out, built-in powerful 2-Watt speaker and RS-232C for control. Full 3D compatibility to enable you to immerse the audience in the action.

The Optoma DW326e is economical and easy to operate. Features the latest Optoma Eco+ technology for ultra long lamp life and has whisper quiet operation for distraction-free presentations.





**CONNECTIVITY** (May require optional accessories)

\_\_\_\_\_ Ø @ ----3D BLU-RAY/DVD PLAYERS

SET TOP BOXES











COMPUTERS

DLP

TEXAS INSTRUMENTS

PHONES

CAMCORDERS

CONSOLES

CAMERAS

Roku<sup>®</sup>

Apple TV®

### MULTIMEDIA PROJECTOR - DW326e

## **OPTICAL/TECHNICAL SPECIFICATIONS**


Display Technology	Single 0.65" DC3 DMD
	DLP <sup>®</sup> Technology by Texas Instruments <sup>™</sup>
Native Resolution	WXGA (1280 x 800)
Maximum Resolution	UXGA (1600 x 1200)
Brightness	3000 lumens
Contrast Ratio	13,000:1 (full on/full off)
Displayable Colors	1.07 Billion
Lamp Life and Type*	6000/5000 Hours (ECO/normal) 190W
Projection Method	Front, rear, ceiling mount, table top
Keystone Correction	±40° Vertical
Uniformity	>85%
Aspect Ratio	16:10 Native, 16:9, 4:3 compatible
Throw Ratio (Distance/Width)	1.55–1.7
Projection Distance	3.2'-32.8' (1-10 m)
Image Size (Diagonal)	27.2"-301" (0.69-7.6 m)
Projection Lens	F=2.5-2.67, f=21.8-23.98 mm,
	1.1x manual zoom and focus
Digital Zoom	0.8~2.0
Offset	112%
Audio	One 2-Watt speaker
Noise Level	28dB
Remote Control	IR remote control
Operating Temperature	41-104°F (5-40°C), 85% max humidity
Power Supply	AC input 100–240V, 50–60Hz, auto-switching
Power Consumption	Max 249W (Normal), Min 202W (Eco+), <0.5W (standby-ECO)

### **COMPATIBILITY SPECIFICATIONS**

Computer Compatibility	UXGA, UXGA, SXGA+, WXGA+, WXGA, SXGA, XGA, SVGA, VGA resized, VESA, PC and Mac compatible
Video Input Compatibility	NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i/p)
3D Compatibility <sup>†</sup>	Top and bottom, side by side, frame packing, HQFS. See user manual for details. 3D glasses are needed and sold separately.
Vertical Scan Rate	24–85Hz, 120Hz, 144Hz
Horizontal Scan Rate	15.375–91.4KHz
User Controls	Complete on-screen menu, adjustments in 27 languages
VO Connection Ports	HDMI v1.4a, VGA-in, VGA-out, S-video, composite video, RS-232C, Audio-in, Audio-out

## PHYSICAL SPECIFICATIONS

Security	Kensington <sup>®</sup> Lock Port and keypad lock
Weight	5 lb (2.27 kg)
Dimensions (W x H x D)	11.28" x 3.98" x 7.6" (287 x 101 x 193 mm)

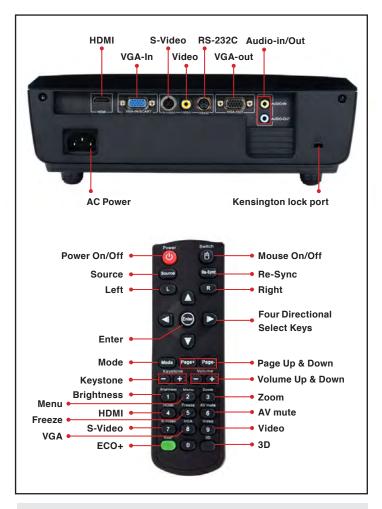

#### Warranty

1-Year Limited Parts and Labor, 90-Days on Lamp

#### In the Box (Standard Accessories)

DW326e projector, carrying case, AC power cord, VGA cable, remote control, batteries for remote, multilingual CD-ROM user's manual, quick start card, and warranty card

#### **Optional Accessories**

Ceiling mount, Optoma screens and DLP<sup>®</sup> Link<sup>™</sup> 3D glasses

#### **Accessory Part Numbers**

Lamp: BL-FP190B	Mount: BM-5001U
Remote: BR-5048N	DLP <sup>®</sup> Link <sup>™</sup> 3D glasses: BG-ZD301
Carrying case: BK-4032	

**UPC** 796435 41 877 9

## www.OptomaUSA.com



\*Lamp life is dependent on many factors, including lamp mode, display mode, usage, environmental conditions and more. Lamp brightness can decrease over time.

<sup>†</sup>3D content can be viewed with either RF or DLP Link active shutter glasses when projector is used with a compatible 3D player. *RF 3D glasses* require the use of an *RF 3D emitter* and a projector with a 3D VESA Sync port. Please visit www.OptomaUSA.com for more information.

Copyright © 2013 Optoma Technology, Inc. DLP<sup>®</sup> and the DLP logo are registered trademarks of Texas Instruments<sup>™</sup>. All other trademarks are the property of their respective owners. All specifications subject to change at any time. 81613-A