




Key Features

- Large Images in Small Spaces | All-in-One
- Interactive Solution | vBoard™ interactive software |
- Optional Qwizdom Oktopus™ Software | Network
- Monitoring & Control



Product Description


With out-of-the-box interactivity and an ultra-short throw lens, the ViewSonic® PS750HD 1080p projector delivers a complete interactive solution perfect for any classroom. Featuring an embedded camera, along with an included laser curtain module, interactive pens, and wall mount kit, the PS750HD offers a low-cost, big picture alternative to interactive whiteboards and displays. An ultra-short throw lens enables the projector to be placed just inches away from a wall or screen, making it flexible enough to be ceiling-mounted or simply placed on the tabletop. ViewSonic easy-to-use vBoard software lets users write, highlight, edit, and transform documents and images on-screen in real-time. PortAll™, a neatly designed and enclosed HDMI/MHL dongle compartment, features an integrated micro USB cable for easy charging – allowing teachers to present interesting lesson content via wireless dongles and PC sticks. For a complete, all-in-one interactive projection solution, the PS750HD delivers everything you need for immersive and engaged learning in the classroom.

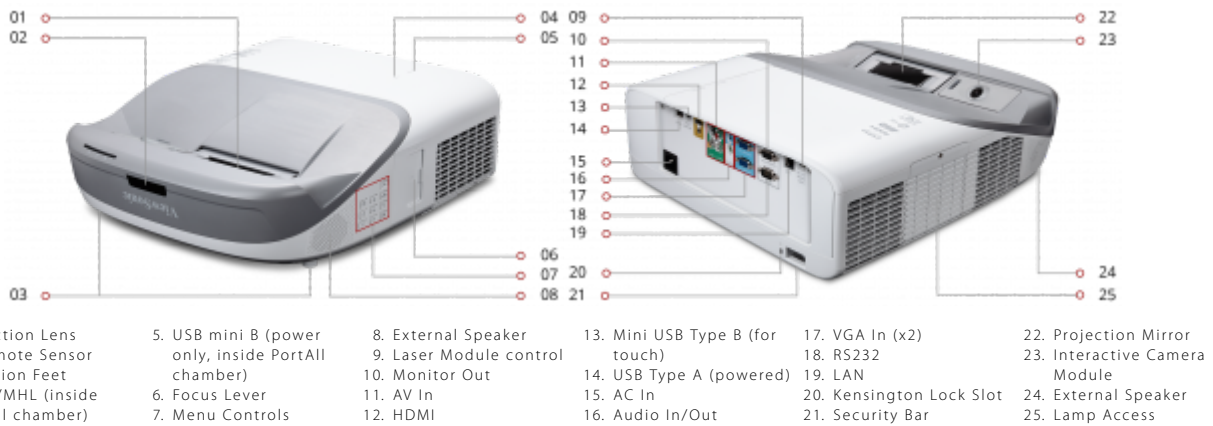

1920 x 1080
RESOLUTION



3,000
LUMENS



0.22
THROW RATIO

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Display:

Type:	DLP
Resolution Type:	1080p
Resolution:	1920 x 1080
Brightness (ANSI Lumens):	3,000
Throw Distance:	0.33 - 0.75 ft / 101.6 - 228.6 mm
Throw Ratio:	0.22
Display Size (in.):	87 – 120 in. / 2.21 - 3.05 m
Keystone:	Vertical ($\pm 30^\circ$) / Horizontal ($\pm 30^\circ$)
Lens:	Manual optical focus
Light Source (watt):	240
Light Source Life, Normal (hours):	3000
Light Source Life, Dynamic Eco-Mode (hours):	7500
Color Depth:	1.07B Color (R/G/B 10bit)
Dynamic Contrast Ratio:	10,000:1
Aspect Ratio:	16:9

Video Signal:

Frequency Horizontal:	15K~102kHz
Frequency Vertical:	23~120Hz

Compatibility:

PC Resolution (max):	VGA(640 x 480) to WUXGA_RB(1920 x 1200) *RB-Reduced Blanking
Mac® Resolution (max):	VGA(640 x 480) to WUXGA_RB(1920 x 1200) *RB-Reduced Blanking

Connector:

USB 2.0 Type A(2), Ethernet LAN (RJ45)(1), 3.5mm Audio Out(1), 3.5mm Audio In(1), RS232 Out(1), HDMI(1), HDMI MHL(1), VGA In(2), VGA Out(1), Composite RCA Video In(1), S-Video In(1), Mini USB(2), RCA Audio In (L/R) (1)

Audio:

Internal Speakers:	10W (x2)
--------------------	----------

Power:

Voltage:	AC 100-240V (universal), 50-60Hz
Consumption (max):	410W
Stand-by:	<0.5W

Controls:

Physical Controls:	Power, My Button, COMP1., COMP2., HDMI, Auto Sync, Source, 4 direction buttons, Enter, Menu, Laser, Exit, Mouse Left, Mouse Right, Pg Up, Pg Dn, Mouse, Pattern, Blank, Keypad Lock, Volume Mute, HELP, Presentation Timer, Volume, Magnify, Eco Mode, Audio Mode, Color Mode
On Screen Display:	Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)

Operating Conditions:

Temperature:	32-104° F (0-40° C)
Humidity (non-condensing):	0-90%

Additional Hardware:

Kensington Lock Slot:	1
-----------------------	---

Weight (imperial):

Net (lbs):	13.38
Gross (lbs):	18.71

Weight (metric):

Net (kg):	6.08
Gross (kg):	8.5

Dimensions (imperial) (WxHxD):

Packaging (in.):	23.23 x 19.69 x 10.83
Physical (in.):	17.09 x 15.28 x 6.02

Dimensions (metric) (WxHxD):

Packaging (mm):	590 x 500 x 275
Physical (mm):	434 x 388 x 153

General:

Regulations:	FCC,CE EMC,CB,ROHS, WEEE, Mexico NOM, cTUVus
PACKAGE CONTENTS:	PS750HD projector, wall mount, interactive module, interactive software, 2 x interactive pens, power cable, VGA cable, remote control with AAA batteries, Quick Start Guide, ViewSonic Wizard CD (with User Guide)
Warranty:	Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service**
Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
UPC:	766907912319
Accessories:	PGD-350, PJ-WMK-303, RLC-107, SW-110, SW-111, VC10, VCB10