





## Key Features

- Large Images in Small Spaces | All-in-One
- Interactive Solution | vBoard™ interactive software |
- Optional Qwizdom Oktopus™ Software |
- SuperColor™: Amazing Color Accuracy



## Product Description


With out-of-the-box interactivity and an ultra-short throw lens, the ViewSonic® PS750W WXGA projector delivers a complete interactive solution perfect for any classroom. Featuring an embedded camera, along with an included laser curtain module and wall mount kit, the PS750W offers a low-cost, big picture alternative to interactive whiteboards and displays. An ultra-short throw lens enables the projector to be placed just inches away from a wall or screen, making it flexible enough to be ceiling-mounted or simply placed on the tabletop. ViewSonic’s easy-to-use vBoard® software lets users write, highlight, edit, and transform documents and images on-screen in real-time. PortAll®, a neatly designed and enclosed HDMI/MHL dongle compartment, features an integrated micro USB cable for easy charging – allowing teachers to present interesting lesson content via wireless dongles and PC sticks. For a complete, all-in-one interactive projection solution, the PS750W delivers everything you need for immersive and engaged learning in the classroom.

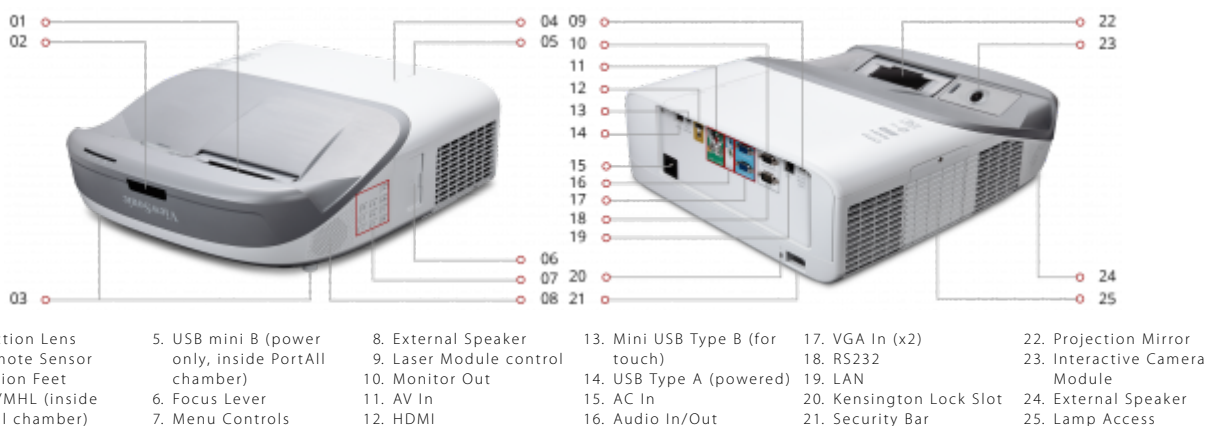

1280 x 800  
**RESOLUTION**



3,300  
**LUMENS**



0.23  
**THROW RATIO**

### Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

**Display:**

Type:	DLP
Resolution Type:	WXGA
Resolution:	1280 x 800
Brightness (ANSI Lumens):	3,300
Throw Distance:	1.43 – 1.97 ft / 0.44 – 0.60 m
Throw Ratio:	0.23
Display Size (in.):	87 – 120 in. / 2.21 - 3.05 m
Keystone:	Vertical ( $\pm 30^\circ$ ) / Horizontal ( $\pm 30^\circ$ )
Lens:	Manual optical focus
Light Source (watt):	240
Light Source Life, Normal (hours):	3000
Light Source Life, Dynamic Eco-Mode (hours):	7500
Color Depth:	30 bits, 1.07B Color (10+10+10)
Dynamic Contrast Ratio:	10,000:1
Aspect Ratio:	16:10

**Video Signal:**

Frequency Horizontal:	15-100kHz
Frequency Vertical:	24-120Hz

**Compatibility:**

PC Resolution (max):	1920x1080
Mac® Resolution (max):	1920x1080 (may require MAC adapter)

**Connector:**

USB 2.0 Type A(1), USB Type A (5V 2A) (1), Mini USB Type B(2), Audio Output (Mini Jack)(1), Ethernet LAN (RJ45)(1), 3.5mm Audio In(1), Control (RS232)(1), HDMI 1.4(1), HDMI 1.4/MHL 2.0(1), VGA Out(1), Composite RCA Video In(1), S-Video In(1), RCA Audio In (L/R)(1), RGB Input(2)

**Audio:**

Internal Speakers:	10W (x2)
--------------------	----------

**Power:**

Voltage:	AC 100-240V (universal), 50-60Hz
Consumption (max):	410W
Stand-by:	<0.5W

**Controls:**

Physical Controls:	Power, My Button, COMP1., COMP2., HDMI, Auto Sync, Source, 4 direction buttons, Enter, Menu, Laser, Exit, Mouse Left, Mouse Right, Pg Up, Pg Dn, Mouse, Pattern, Blank, Keypad Lock, Volume Mute, HELP, Presentation Timer, Volume, Magnify, Eco Mode, Audio Mode, Color Mode
On Screen Display:	Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)

**Operating Conditions:**

Temperature:	32-104° F (0–40° C)
Humidity (non-condensing):	0-90%

**Weight (imperial):**

Net (lbs):	13.38
Gross (lbs):	18.71

**Weight (metric):**

Net (kg):	6.08
Gross (kg):	8.5

**Dimensions (imperial) (WxHxD):**

Packaging (in.):	23.23 x 19.69 x 10.83
Physical (in.):	17.09 x 15.28 x 6.02

**Dimensions (metric) (WxHxD):**

Packaging (mm):	590 x 500 x 275
Physical (mm):	434 x 388 x 153

**General:**

Regulations: FCC (including ICES003), cTUVus, NOM, TUV-Rheinland S Mark

PACKAGE CONTENTS: PS750W Projector, PJ-WMK-303, Laser Curtain Module, 2 IR Pens, Power Cable, VGA Cable, Remote Control with AAA Batteries, Quick Start Guide, ViewSonic Wizard CD (with User Guide)

Warranty: Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service\*\*

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

UPC: 766907889413

**Accessories:**

PGD-350, PJ-WMK-301, PJ-WMK-303, RLC-107, SW-110, SW-111, VC10